



Stone Look


COLOR BODY • GLAZED PORCELAIN

BEST  TILE® / BESTTILE.COM

Quartz Essence



BURNT

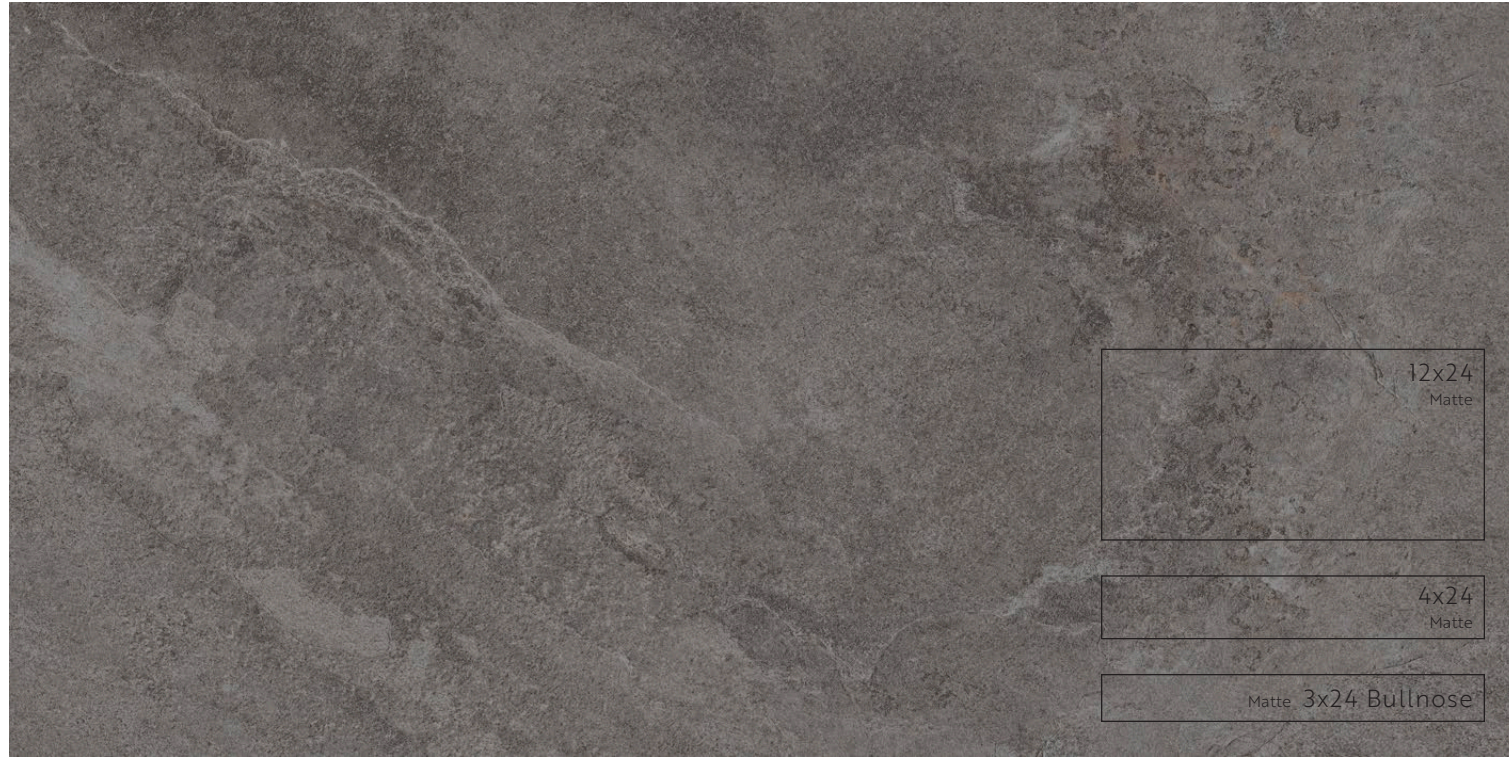

FLAKE



DECORS



2x2 Mosaic
on 12x12 Sheet

VARIATION



DECORS



2x2 Mosaic
on 12x12 Sheet

VARIATION





NEST



12x24
Matte

4x24
Matte

Matte 3x24 Bullnose

DECORS



2x2 Mosaic
on 12x12 Sheet


VARIATION



ROCKY



WILD

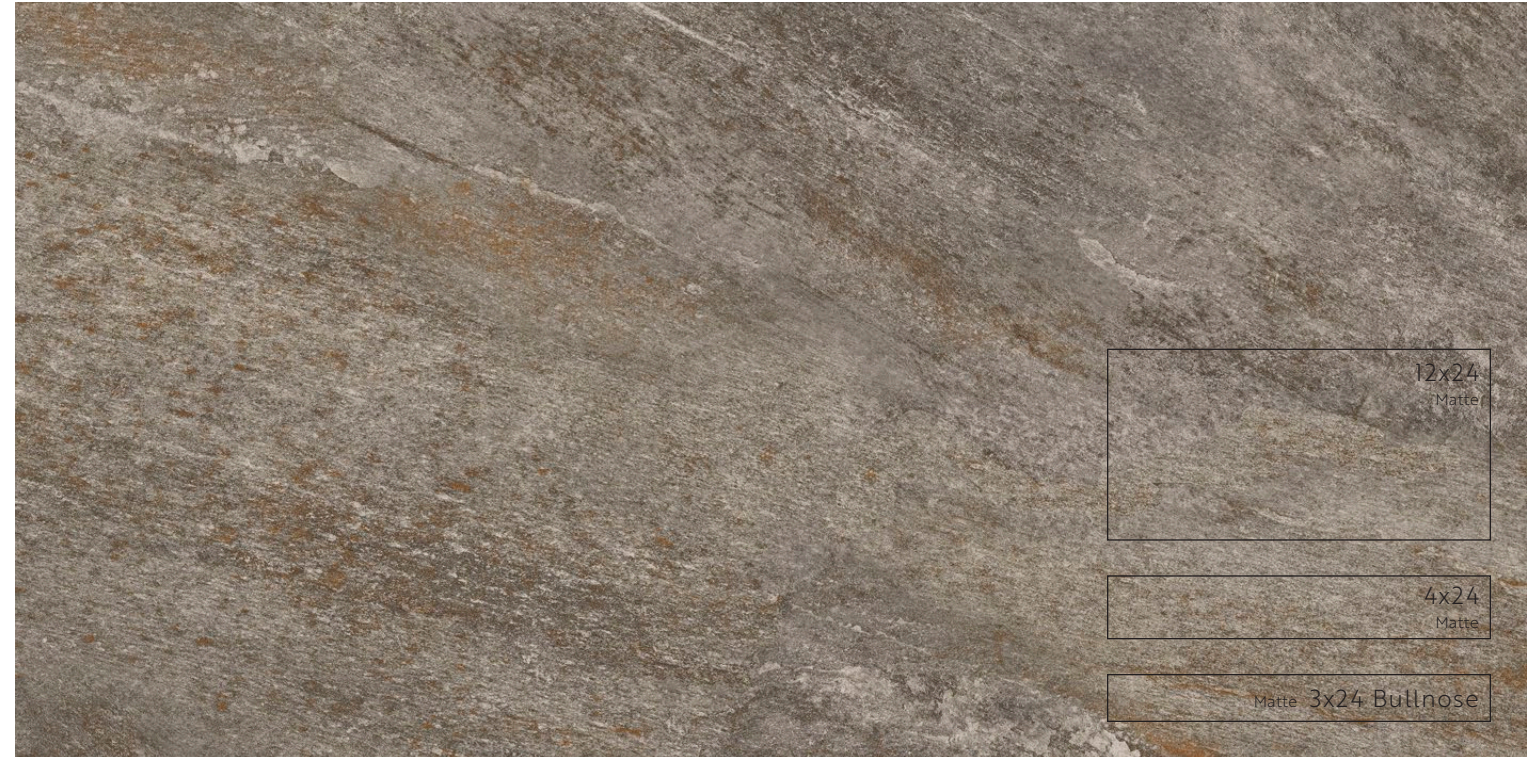

DECORS



2x2 Mosaic
on 12x12 Sheet

VARIATION



DECORS



2x2 Mosaic
on 12x12 Sheet

VARIATION



Stone Look

COLOR BODY • GLAZED PORCELAIN

Quartz Essence

COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	GROUT JOINT	BURNT	FLAKE	NEST	ROCKY	WILD
12 x 24 Rectified	Matte	1/8"	✓	✓	✓	✓	✓
4 x 24 Rectified	Matte	1/8"	✓	✓	✓	✓	✓
2 x 2 Mosaic	Matte	NA	✓	✓	✓	✓	✓
3 x 24 Bullnose	Matte	1/8"	✓	✓	✓	✓	✓

✓ Stock Item. ☐ Non-Stock Item. Requires Extra Lead Time.

TECH INFO

<p>ORIGIN: Italy</p> <p>SHADE VARIATION: Wild: V3 - Moderate Variation; All other colors: V2 - Slight Variation</p> <p>WEAR RATING: 5 - Walls + Residential / Commercial Floor Applications</p> <p>It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.</p>	RECOMMENDED APPLICATIONS	R	LC	C
	FLOORS	●	●	●
	WALLS / BACKSPLASH	●	●	●
	POOL DECKING	*	*	
	EXTERNAL USE - FROST PROOF	*	*	

● - Approved for this application. * - Discuss proper installation method with your Sales Representative.

TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.1 %
Abrasion Resistance (Glazed)	ISO 10545-7	5
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resistant
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Cleanable



VIEW WEBPAGE

Floor // QUARTZ ESSENCE FLAKE 12X24

BEST  TILE[®]
BESTTILE.COM