

Subway Tile

GLAZED CERAMIC

BEST TILE® / BESTTILE.COM

Wellfleet

COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	AQUAMARINE	CERULEAN	COCONUT	EUCALYPTUS	NAVY	PETROLEUM	PINK PROSECCO	RAIN	SEASHELL	SEPIA
2 x 6.5	Glossy	10 mm	3/16"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
5 x 5	Glossy	10 mm	3/16"	✓	✓	✓	✓				✓	✓	✓
.5 x 13 Quarter Round	Glossy	10 mm	3/16"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.

TECH INFO


R = Residential, LC = Light Commercial, C = Commercial

ORIGIN: Italy SHADE VARIATION: V3 - Moderate Variation WEAR RATING: Class 1 - Rated for wall applications only Layout and blend cartons prior to installation.	RECOMMENDED APPLICATIONS	R	LC	C
	FLOORS			
	WALLS / BACKSPLASH	●	●	●
	POOL DECKING			
	EXTERNAL USE - FROST PROOF			

● Approved for this application. * Discuss proper installation method with your Sales Representative.

TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ISO 10545-3	> 0.10 %
Abrasion Resistance (Glazed)	ISO 10545-7	1
Chemical Resistance - Household Chemicals	ISO 10545-13	Conforms
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Conforms
Resistance to Stains	ISO 10545-14	Conforms
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

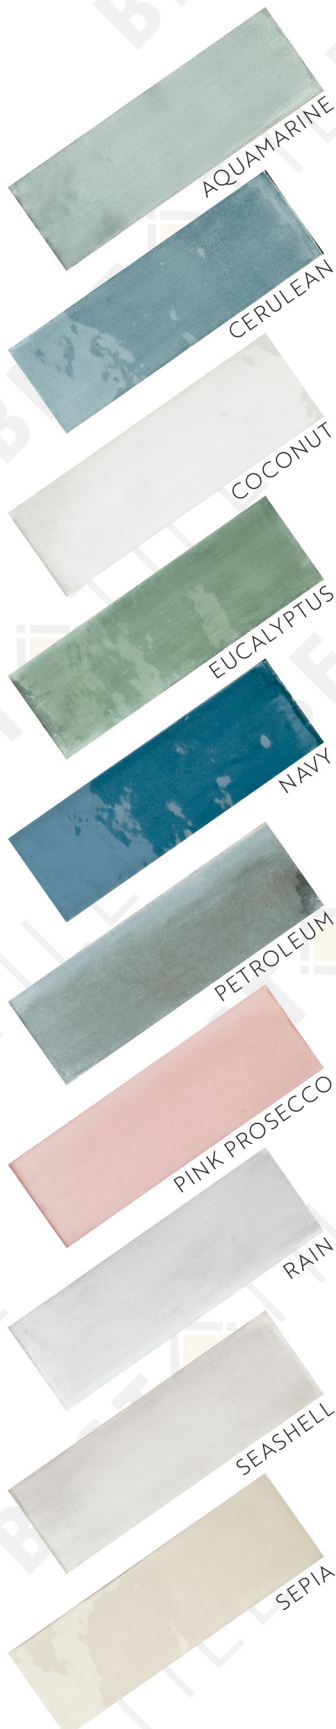

Always inspect materials prior to installation. Always mix 2-3 cartons at a time while installing to ensure the best blend. All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.