

Easel | Porcelain




AVAILABLE SIZES

- 4x12
- 12x24
- 12x24
Ribbed
- 12x24
Chesterfield
- 12x24
Triangles
- 2x2 Mosaic
on 12x12 sheet
- 3x24 Bullnose

DESCRIPTION

Easel is a colorbody porcelain tile with multiple design options on a limestone tile background. The Easel series comes in a rectified 12" x 24" and 4" x 12" rectangular tile format, enhanced with three unique design options: 'Chesterfield' Tweed Pattern, 'Triangles' Geometric Pattern, and 'Ribbed' Linear Pattern. A 2" x 2" mesh-mounted mosaic tile is also available. All formats are offered in four soft colorways: Light Grey, Greige, Sand and White. Easel porcelain tile balances the purity of natural limestone tile surfaces with striking porcelain tile design sophistication.

COLORS

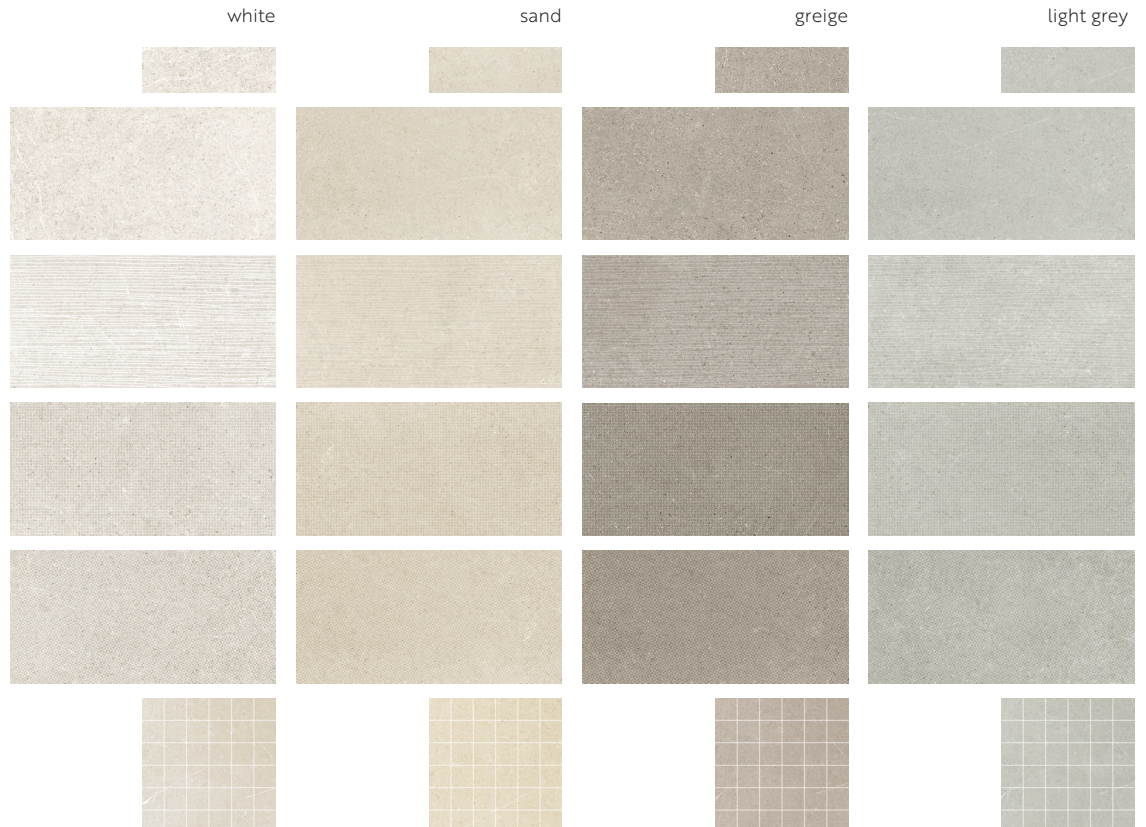

TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
4 x 12 Rectified		Matte	9.5 mm	✓
4 x 12 Ribbed Rectified		Matte	9.5 mm	⌚
4 x 12 Chesterfield Rectified		Lappato	9.5 mm	⌚
4 x 12 Triangles Rectified		Lappato	9.5 mm	⌚
12 x 24 Rectified		Matte	9.5 mm	✓
12 x 24 Ribbed Rectified		Matte	9.5 mm	✓
12 x 24 Chesterfield Rectified		Lappato	9.5 mm	✓
12 x 24 Triangles Rectified		Lappato	9.5 mm	✓
24 x 24 Rectified		Matte	9.5 mm	⌚
24 x 24 Ribbed Rectified		Matte	9.5 mm	⌚
24 x 24 Chesterfield Rectified		Lappato	9.5 mm	⌚
24 x 24 Triangles Rectified		Lappato	9.5 mm	⌚
24 x 48 Rectified		Matte	9.5 mm	⌚
24 x 48 Ribbed Rectified		Matte	9.5 mm	⌚
24 x 48 Chesterfield Rectified		Lappato	9.5 mm	⌚
24 x 48 Triangles Rectified		Lappato	9.5 mm	⌚
48 x 48 Rectified		Matte	9.5 mm	⌚
48 x 48 Ribbed Rectified		Matte	9.5 mm	⌚
48 x 48 Chesterfield Rectified		Lappato	9.5 mm	⌚
48 x 48 Triangles Rectified		Lappato	9.5 mm	⌚
2x2 Mosaic		Matte	9.5 mm	✓

COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
3 x 24 Bullnose		Matte	9.5 mm	✓

✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.

WEAR CODE

Sand / White: 5 - Rated for all residential and commercial applications
Greige / Light Grey: 4 - Rated for all residential and light commercial applications

PERFORMANCE DATA

Characteristic	Norms	Results
Water Absorption	ISO 10545-3	≤ 0.5 %
Deep Abrasion	ISO 10545-6	≤ 175 mm3
Abrasion Resistance	ISO 10545-7	Sand/White = 5, Greige Light Grey = 4
Breaking Strength	ISO 10545-4	≥ 35 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42 12x24 Decos: N/A
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Class B min
Chemical Resistance - Low Concentration of Acids	ISO 10545-13	Class B min
Thermal Shock Resistance	ISO 10545-9	Conforms
Resistance to Stains	ISO 10545-14	Class 5

SHADE VARIATION



V2 - SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern within similar colors.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	✗ (Sand/White)
WALLS / BACKSPLASH	✗	✗	✗ (Sand/White)
POOL DECKING			
EXTERNAL USE - FROST PROOF	*	*	*

✗ - Has been approved for this application.

* - Discuss proper installation method with your Sales Representative.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.